



**pronutec**  
gorlan

**Global Low Voltage Monitoring System**  
Smart Grids Solutions

**pronutec**  
gorlan

**merytronic**  
gorlan

 **ariadna**



# Global Low Voltage Monitoring System

Smart Grids Solutions



---

## New scenario <sup>P4</sup> of LV Distribution Grid

01

---

## Complete solution <sup>P6</sup>

02

---

## Main features <sup>P7</sup>

03

---

## Product range <sup>P8</sup>

04

### 04.1 Smart Fuse Switch (SFS) <sup>P8</sup>

Lower Solution (NH 1/2/3) <sup>P8</sup>

Upper Solution (NH 00/1/2/3) <sup>P10</sup>

Feeder meter | TSA & SBT 00 <sup>P14</sup>

### 04.2 LV Edge Node <sup>P15</sup>

### 04.3 LV Transformer Supervisor <sup>P16</sup>

### 04.4 Ariadna Smart IoT Platform <sup>P18</sup>

---

# CHALLENGES OF LV ADVANCED MONITORING

---

Climate change - Decarbonisation

---

Demand response

---


Reduction of losses/fraud

---


Improve grid availability

---



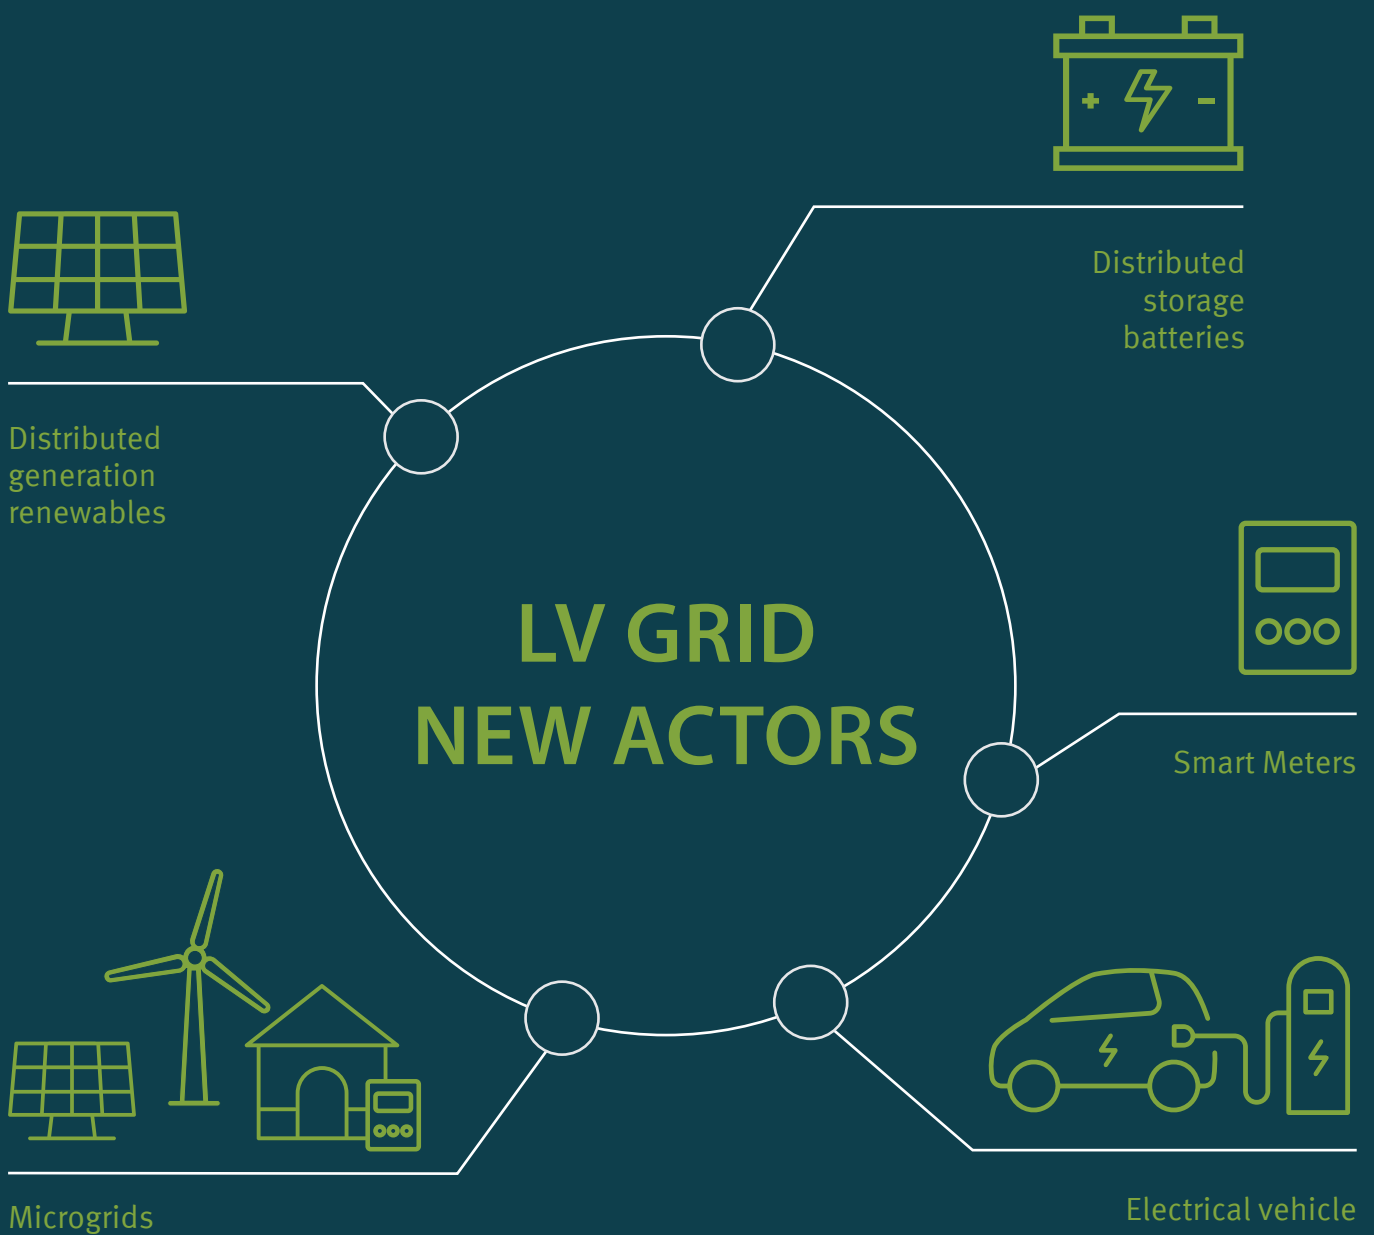

## 02 Complete solution

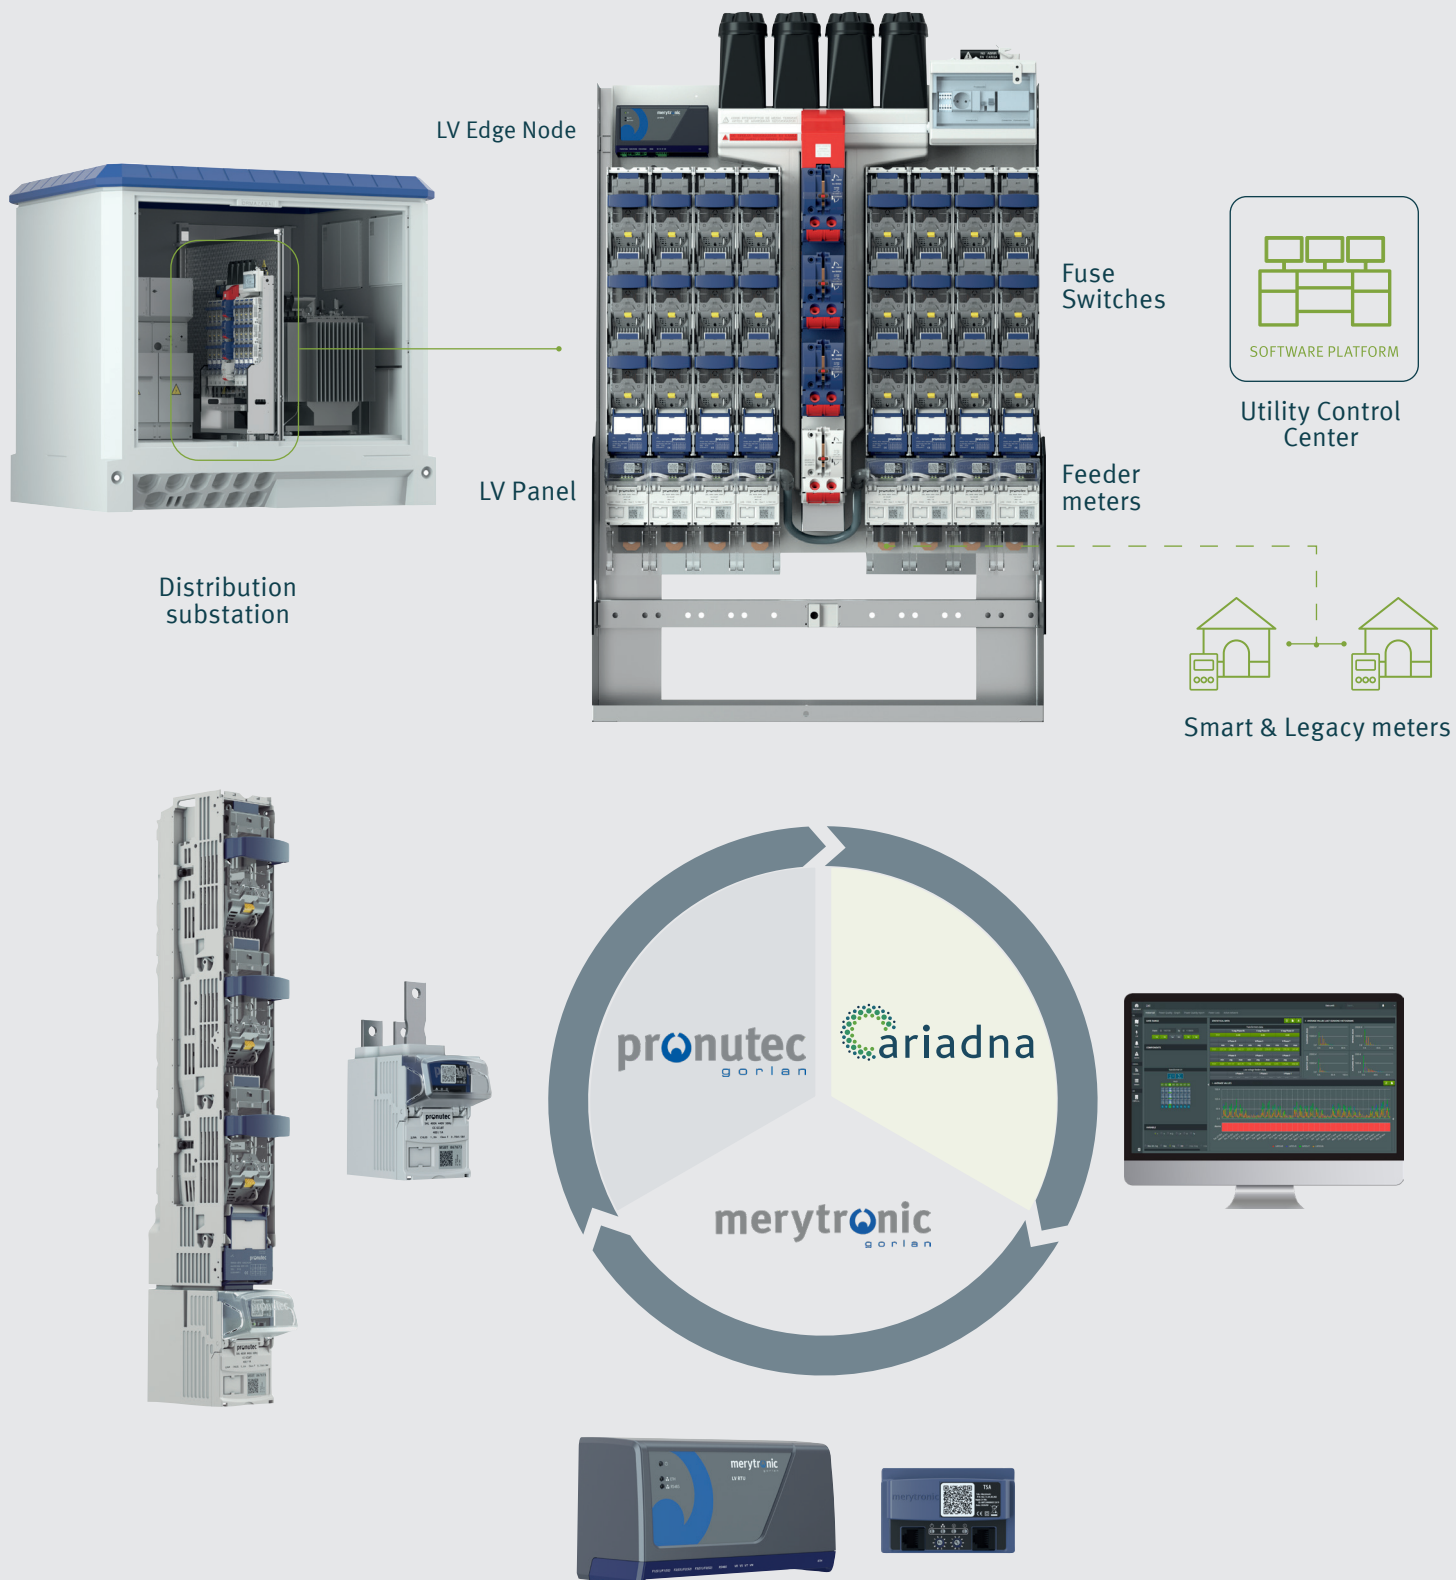



## 03 Main features



### LV ADVANCED SUPERVISION



Real time electrical parameters per line and phase



Different Alarms per line and phase



### Oscillography

High resolution voltage and current samples in case of an event



### INCOMING SUPERVISION



### Power quality

According to EN50160 / IEC61000-4-30



### Oscillography

High resolution voltage samples



### Transformer Supervision

Earth leakage Current measurement  
Incoming measurement  
Transformer regulation




### METERS MAPPING

Automatic detection of transformer, line and phase of every end user meter



### Energy balance

LV Panel feeder energy compared to end user meters one in that line



### Loss detection / Fraud

Automatic fraud detection & Technical losses



### Faster faults location

Based on meters topology



## 04 Product range

### ► 04.1 SMART FUSE SWITCH (SFS)

#### LOWER SOLUTION (NH 1/2/3)

SFS Lower Solution consists of a fuse switch, a SAL (Line Advanced Supervisor) which is assembled beneath the fuse switch, and a feeder meter.


- Compact design & very few cabling
- Protection fuses
- Permits replacement of feeder meters on tension, no need of switching off
- Possible RETROFIT of existing fuse switches

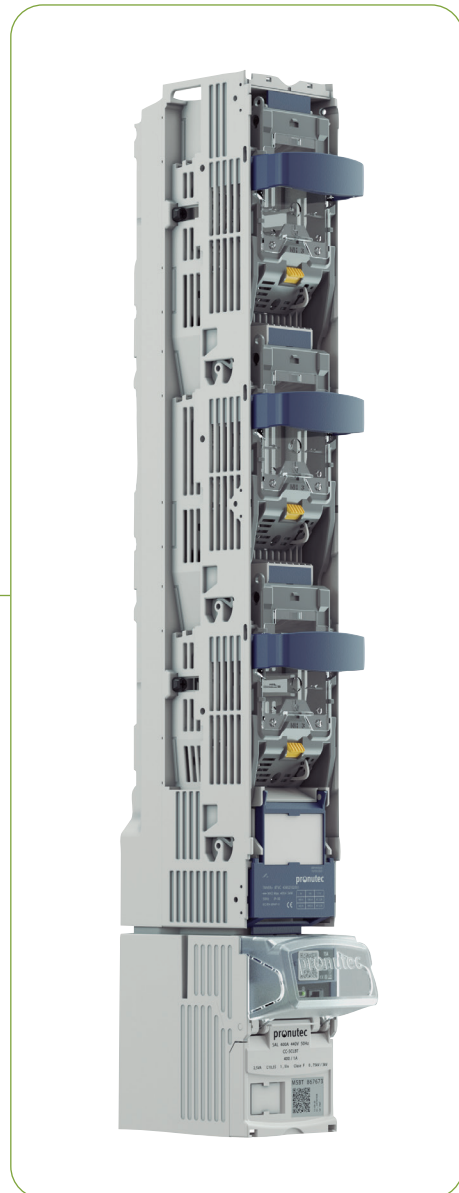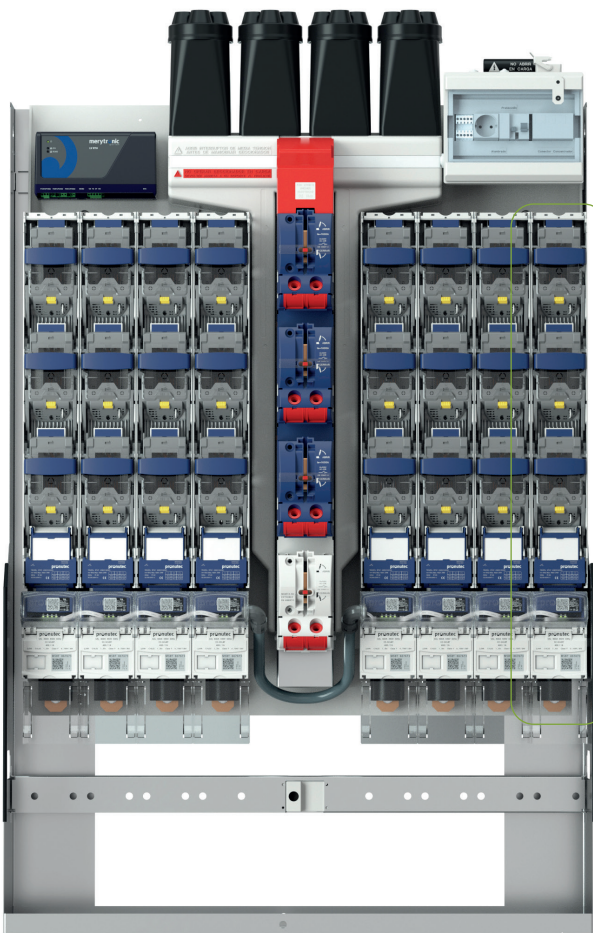



## FEATURES

Three phase supervisor per outgoing.  
Built-in Current Transformers / Voltage taps.

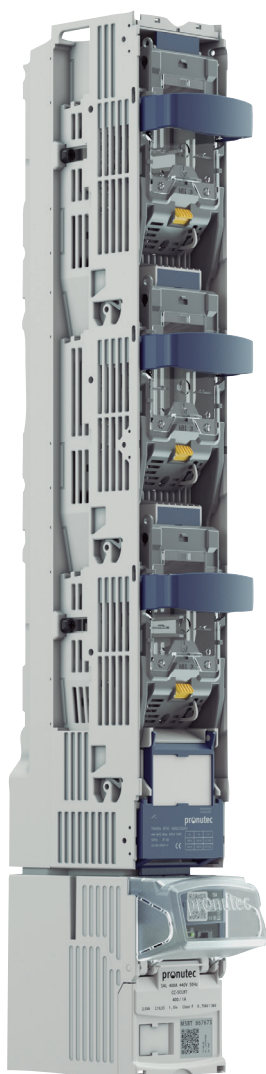

### LV Fuse Switch size NH 1/2/3

These fuse switches can incorporate the entire range of Pronutec accessories and terminals.



### TSA (Advanced Supervision Card)

The feeder meter is assembled inside of the Supervisor (SAL). It's a three phase meter which reads all the electrical parameters and send them to the LV Remote unit through RS485 serial bus ports.



### SAL (Line Advanced)

It includes built-in current transformers and a voltage taps per phase.

Available current transformers with different current ratios, based on fuse switches amperage.

Current transformer ratios


I prim.	I sec.	VA	Pr. Cl.	FS	Range
250 A	1 A	2,5 VA	0,5	< 5	120 %
400 A	1 A	2,5 VA	0,5S	< 3	120 %
600 A	1 A	2,5 VA	0,5	< 5	120 %

#### ► 04.1 SMART FUSE SWITCH (SFS)

#### UPPER SOLUTION (NH 1/2/3)

SFS upper solution consists of a fuse switch, protection case on top of it, current transformers, voltage connections and feeder meter.

- Compact design & very few cabling
- Protection fuses
- Permits replacement of feeder meters on tension, no need of switching off

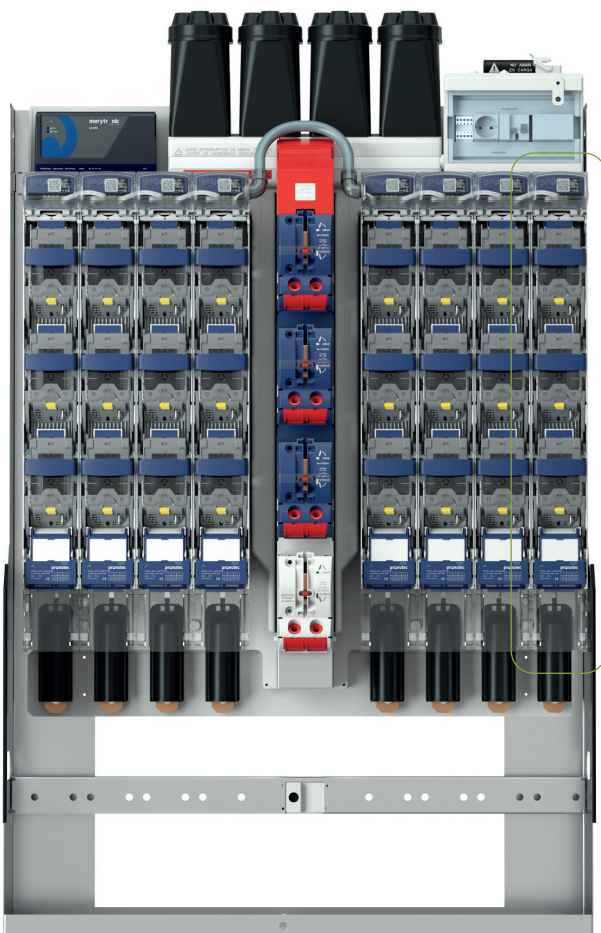




## FEATURES

Protection case per outgoing.


Current Transformers /Voltage taps at the back of the fuse switch.

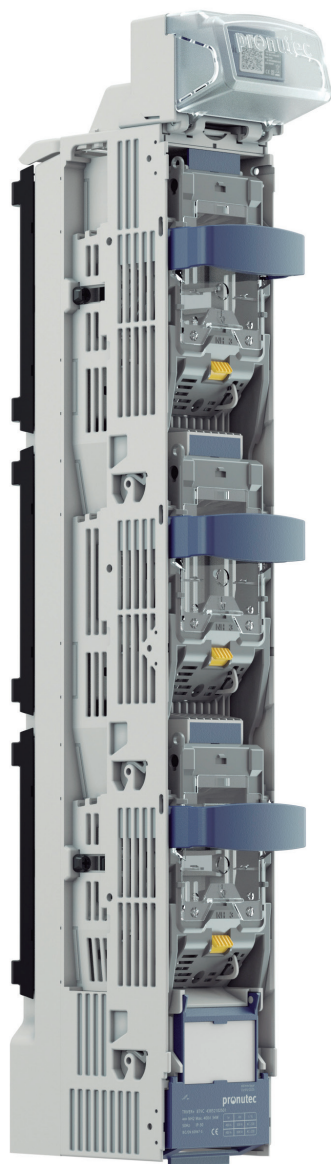

The feeder meter (TSA) is assembled in an upper case on top of the fuse switch. This case includes three protection fuses.

### LV Fuse Switch size NH 1/2/3

These fuse switches can incorporate the entire range of Pronutec accessories and terminals.

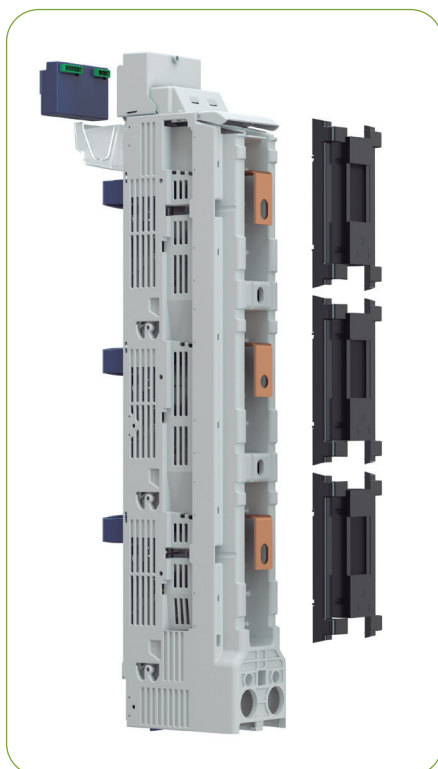

CTs and voltage taps are wired to the protection case in which the feeder meter (TSA) is assembled.

Available current transformers with different current ratios, based on fuse switches amperage.

Current transformer ratios


I prim.	I sec.	VA	Pr. Cl.	FS	Range
250 A	1 A	1,5 VA	1,0	< 5	120 %
400 A	1 A	1,0 VA	0,5	< 5	120 %
600 A	1 A	1,0 VA	0,5	< 5	120 %

## ► 04.1 SMART FUSE SWITCH (SFS)

## FEEDER METER | TSA & SBT 00

### NH 00 | UPPER SOLUTION

The SBT is the feeder meter for NH 00 switches. It's located on top of the fuse switch, as an extension of the BTVC. The SBT is connected to the CT's and voltage taps installed at the rear of the fuse switch.

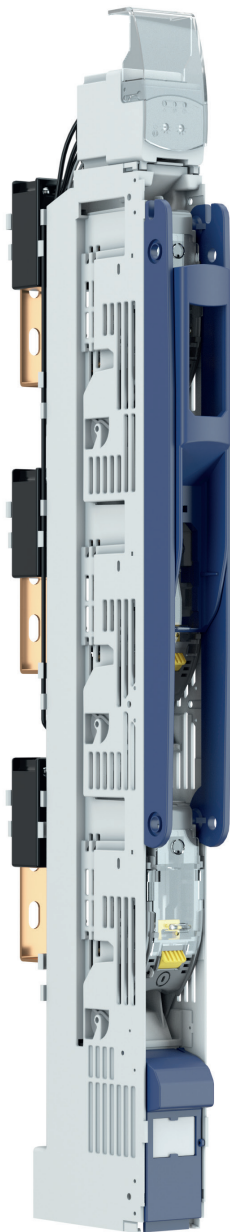



## TSA (ADVANCED SUPERVISION CARD NH 1/2/3)

TSA is a three phase feeder meter compatible with both upper and lower LV monitoring solutions. It calculates RMS values per second of the following variables:


- Voltage per phase
- Current per phase and calculated neutral current
- Imported / exported active, reactive and apparent power per phase and total
- Power factor per phase
- Phase presence
- Frequency
- Cumulative values of imported and exported energy
- Cumulative values of reactive energy in all four quadrants
- Temperature inside the card
- Voltage and current oscilography in case of an alarm

Moreover the card can generate the following alarms per phase: blown fuse, over/under voltage, current overload, shortcircuit current.

TSA can communicate by **DLMS / COSEM** protocol on HDLC with the LV Edge Node, or by **Modbus RTU**. They are connected by a RS485 serial bus in daisychain format (maximum 24 feeder meters per bus).



Front view

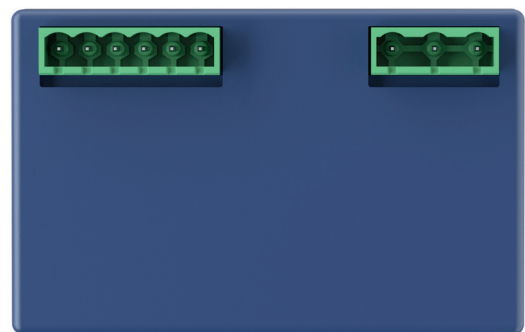

Rear view



The solution for NH 00 fuse switches is SBT 00, with the same capabilities of TSA.


## ► 04.2 LV EDGE NODE

LV Edge Node is the central device of the LV monitoring system at the Distribution substation. Main functions:

- Storage of feeder meters data
- Communication with software platform by:
  - › XML reports - web services
  - › Modbus TCP
- Head of serial bus RS485 connection with feeder meters (DLMS – HDLC)
- DC power supply for feeder meters through RS485 cable
- Additional features:
  - › Power quality
  - › Oscillography
  - › Leakage current / incoming measurement



Front view

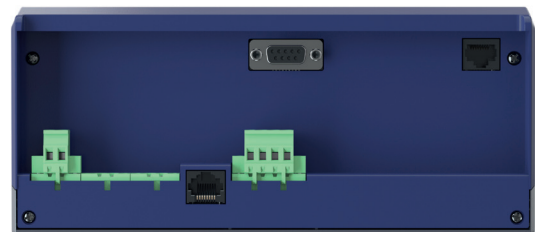


Rear view

### RS485 BUS Connections

Each feeder meter has two RJ45 connectors that implement the RS485 serial bus between one feeder meter and the next one with one single UTP cable.

Last feeder meter is connected to the LV Edge node with another UTP cable.

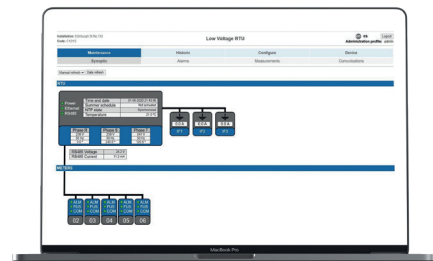


LV Edge Node management web access



Daisy chain connections

## PROTOCOLS

LV Edge Node can send data to Ariadna Smart IoT Platform and SCADA simultaneously using different protocols.

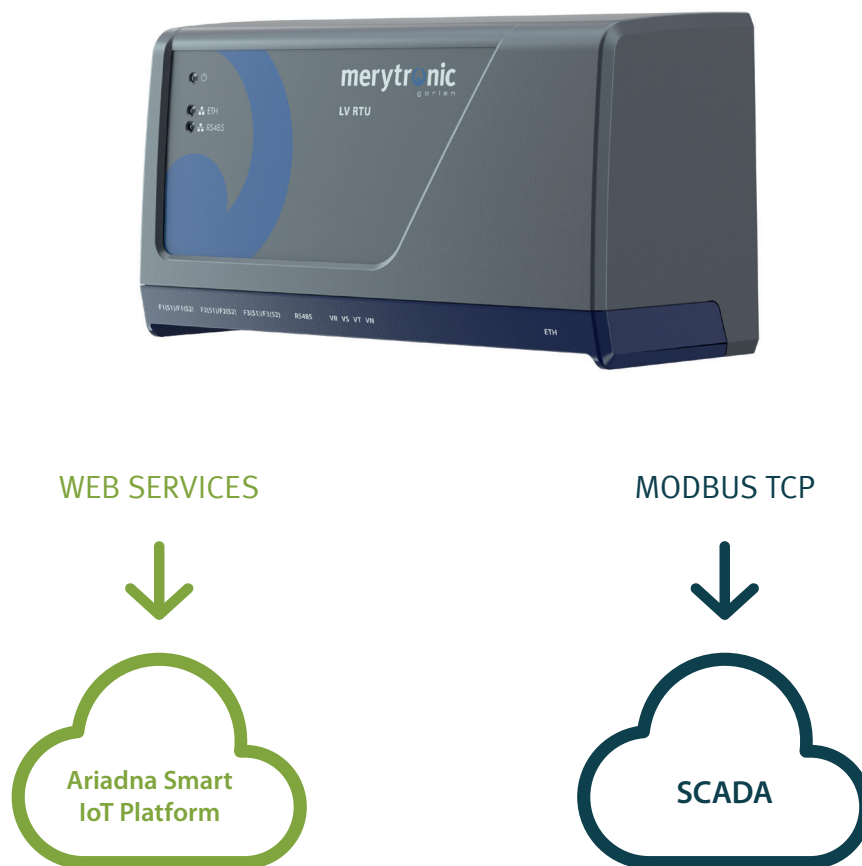

LV monitoring data is gathering interest from an increasing number of utilities departments such as LV infrastructure, O&M, Assets management, Loss detection, etc. Attending this demand, the LV Edge Node provides simultaneously information to Ariadna Smart IoT platform via web services/ XML files and to a general SCADA system using standard telecontrol protocol.

The state-of-the-art LV supervision hardware enables delivery of all necessary information for an specialized LV analysis tool and, at the same time, can be easily integrated into existing SCADA systems for real-time monitoring.



## ► 04.3 LV TRANSFORMER SUPERVISOR

LV Transformer Supervisor is a three phase line supervisor capable of monitoring up to two lines


Main features:

- Up to 6 current inputs and 4 voltage inputs
- Electrical measurements: current, voltage, harmonics and temperature
- 1 RS232/RS485
- 1 Ethernet port
- PT100 input for distribution transformer oil measurement
- Class 1 active and class 2 reactive accuracy
- Easy-to-use interface: LCD display, buttons and visual indicators




Main applications:


Monitoring of LV panel's incoming and distribution transformer supervision

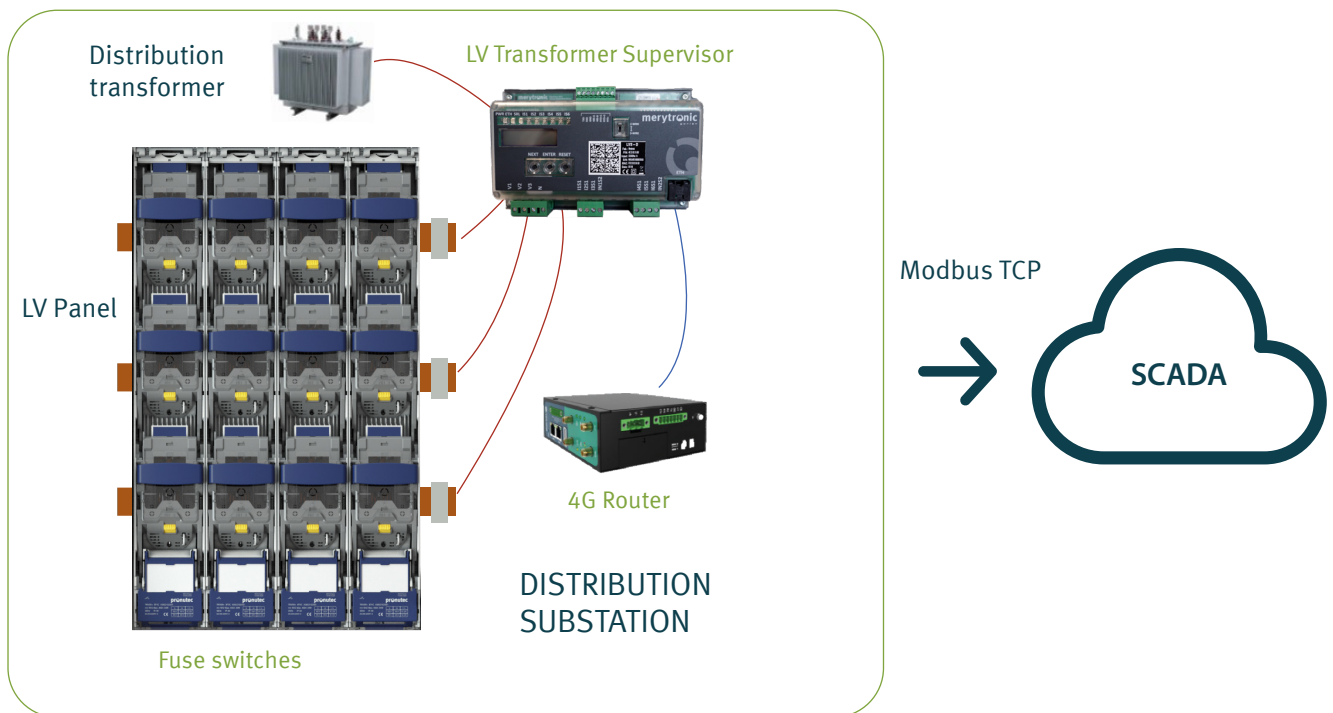

Monitoring of the secondary of an overhead distribution transformer

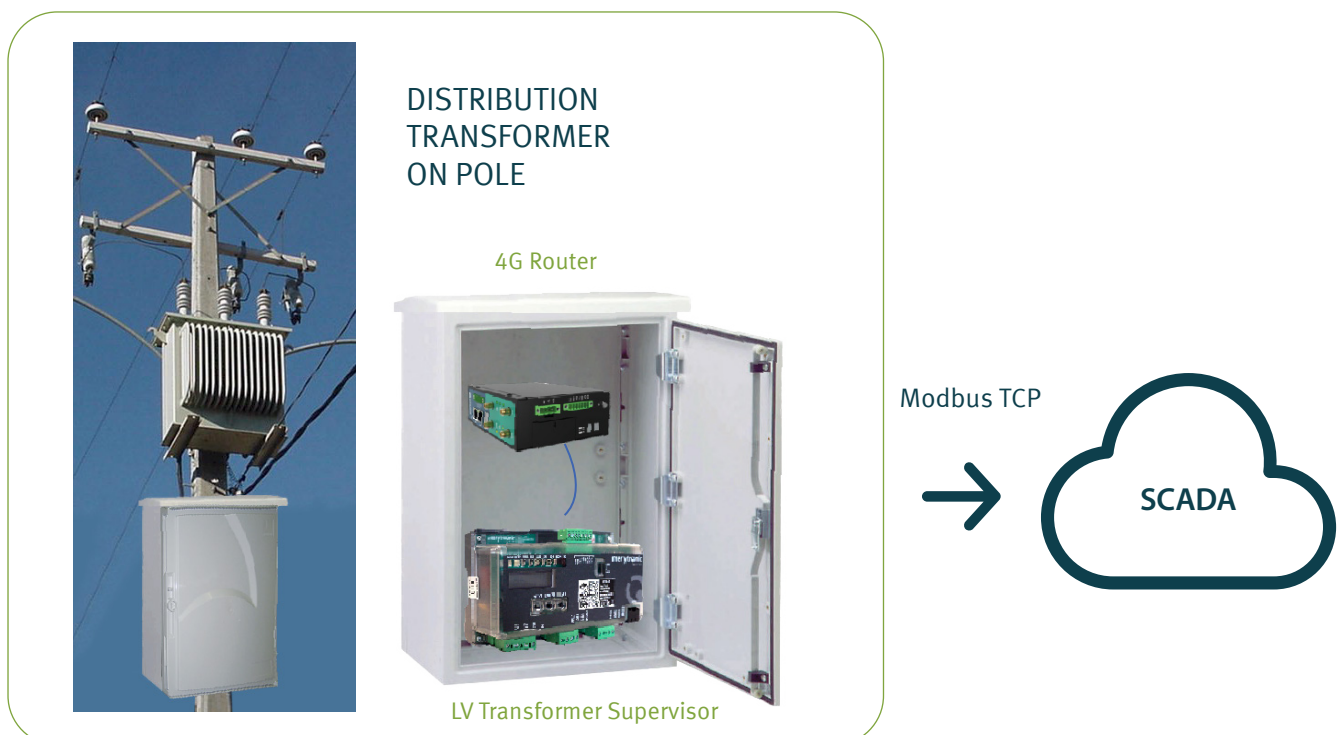

## ► 04.4 ARIADNA SMART IOT PLATFORM

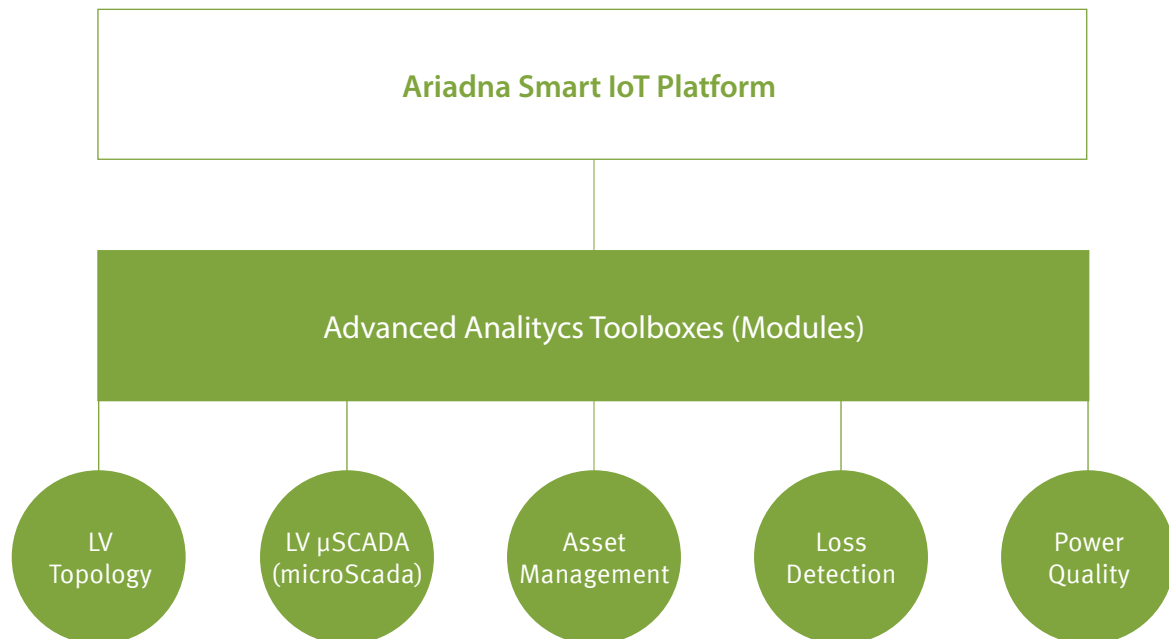

All this information is sent to the software platform called Ariadna Smart IoT Platform. By reading grid assets, it provides advanced LV supervision.

The principal tools of its advanced analytics are: LV topology, LV  $\mu$ SCADA, Asset Management, Loss detection, Alarms and Power Quality.

The platform is scalable, modular, fully-integrated, hardware agnostic and cloud/on-premise.







